


HE TOP CLEAR GLOSS

400ML

REF: 5009-001136

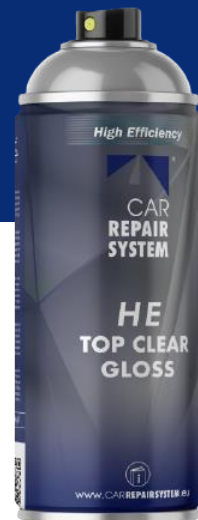

EN

TECHNICAL DATA SHEET

DESCRIPTION

HE TOP CLEAR GLOSS is a fast drying and UV resistant varnish, applicable on all existing solvent-based paints. Currently available in a gloss finish. Due to its finish and ease of polishing, HE Top Clear Gloss is well suited for spot repairs with solvent-based paints.

For a better preparation of the surface to be painted, clean it thoroughly with DEGREASER 0467 CARS FAST 5L (5009-001025) and, if necessary, apply a primer or Filler (Easy Filler 4000).

APPLICATION

The surface must be cleaned, dried, degreased and cured. Mix putty well and 2-3% BPO hardener by weight. Apply within 5 minutes at 20°C. Higher temperatures can shorten shelf life and accelerate drying time.

Note: Using too much hardener may cause discoloration of the top layer. Putty below 15 °C is not recommended.

TECHNICAL DATA

- **Binder base:** Acrylic resin
- **Colour:** Transparent
- **Odor:** solvent
- **Glossy degree:** measuring angle 60 ° acc. DIN 67530 (85 - 90 GE)
- **Yield:** Depends on the nature and color of the background: 400 ml is enough for approx. 1.5 - 2.0 m²
- **Substrate:** Smooth and metallic paints
- **Drying time (at 20 ° C, 50% Relative air humidity):**
- **Dust dry:** after approx. 5 - 10 minutes
- **Dry to the touch:** after approx. 10 - 20 minutes

- Cured after 24 h.
- The drying time depends on the ambient temperature, degree of humidity and number of layers applied.
- **Thermal resistance:** Brightness 110 ° C
- **Storage stability:** 10 years under optimal conditions (= 10 ° -25 ° C, relative air humidity max. 60%)
- **Size:** Aerosol can, nominal maximum volume 400 ml
- **VOC-Value:** Gloss 276.4 g

INSTRUCTIONS FOR USE

1. Before use, read carefully and observe the warning texts on the label.
2. HE Top Clear Gloss can be overcoated after drying for 30 minutes.
3. Shake the can for 2 minutes
4. Do a spray test
5. HE Top Clear Gloss: For spot repairs, blend the edges wet with QUICK SPOTBLENDER 400 ML (5011-001155)
6. HE Top Clear Gloss: Not suitable for overcoating water-based paints.
7. For an optimal result, apply in conditions of outside temperature of (20 - 25 ° C) and a relative humidity of the air of 45 - 60%.
8. * Warning: High relative humidity causes loss of brightness.
9. For professional use only
10. Wear a suitable respirator (recommended type A2 / P3)

SECURITY INFORMATION

See Safety Data Sheet.

AVAILABLE PACKAGING

Code	Description	Packaging
5009-001136	HE TOP CLEAR GLOSS	400 ML

*For more information about our products or means of application, please visit our website www.carrepairsystem.eu or send us an e-mail to info@carrepairsystem.eu

The technical information and instructions provided in this sheet are based on our own working experience. The company ensures the quality of the product. However, as the uses terms and conditions are out of our control, we decline any responsibility as the final result is concerned.